

# ECOLIFT™ 50

NON-POWERED MAST LIFT

LOW-LEVEL  
ACCESS LIFT



## KEY SPECS

**Platform Height**  
5-ft (1.50-m)

**Rated Capacity**  
330-lb (150-kg)

**Working Height**  
11-ft (3.50-m)

## KEY FEATURES

- No hydraulics or batteries, requires less routine maintenance delivering more uptime and less overall cost of ownership.
- Easy maneuverability and lightweight design easily fits through most doorways and freight elevators.
- Safer, more ergonomic alternative to ladders - work comfortably with both hands and 360-degree range of motion.
- Patented, stored power lift/lower system lets you elevate with just the turn of a flywheel.
- Ideal for fit-out applications, areas with sensitive flooring and low ground bearing pressure requirements.

## STANDARD SPECIFICATIONS

### Performance

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| Working Height                      | 11-ft / 3.50-m                    |
| Platform Height                     | 5-ft / 1.50-m                     |
| Stowed Height                       | 61-in / 1.55-m                    |
| Machine Width                       | 28-in / 0.7-m                     |
| Machine Length                      | 39-in / 0.98-m                    |
| Platform Size                       | 28 x 24-in / 0.7 x 0.6-m          |
| Rated Capacity                      | 330-lb / 150-kg                   |
| Weight                              | 432-lb / 196-kg                   |
| Maximum Gradient for Operation      | 0.5 Degrees                       |
| Maximum Gradient for Pushing        | 5 Degrees                         |
| Max Ground Bearing Pressure - Front | 160 psi / 11.2-kg/cm <sup>2</sup> |
| Max Ground Bearing Pressure - Rear  | 168 psi / 11.8-kg/cm <sup>2</sup> |
| Wind Speed                          | 0-mph                             |

## STANDARD FEATURES

- Lanyard Attach Point
- Steel Platform
- Frame-Mounted Bubble Level
- Integrated Fork Pockets
- Protective Wall Bumpers
- Self-Closing Saloon Style Entry Gate with quick pull-out pins for easy removal
- Plastic Tool Tray
- Non-Marking Wheels
- Auto-Braked When Entering Platform
- Auto-Locking Brake on Elevation
- Emergency Descent Rod
- Static Strap

## ACCESORIES & OPTIONS

- Maintenance Tray with Slatted Design to Tether Tools
- Steel Tray Optional

# ECOLIFT™ 50


NON-POWERED MAST LIFT

LOW-LEVEL  
ACCESS LIFT



## DIMENSIONS

All dimensions are approximate

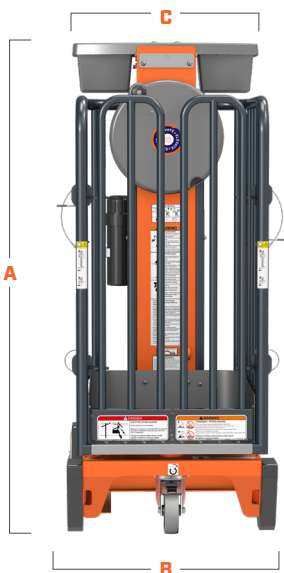

- A.** Machine Height (Stowed) 61-in / 1.55-m
- B.** Machine Width 28-in / 0.7-m
- C.** Platform Width 24-in / 0.6-m



- D.** Machine Length 39-in / 0.98-m
- E.** Platform Length 28-in / 0.7-m
- F.** Rail Height 56-in



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



**JLG INDUSTRIES, INC.**  
Toll-free US 877-JLG-LIFT  
**JLG.com**

**An Oshkosh Corporation Business**