

AG619

TELEHANDLER



The AG619 was purpose-built from the ground up for agricultural applications. This mid-sized telehandler combines the strength to handle larger tasks with the agility typically found in smaller models. With the AG619, you can stack bales higher, travel between fields more efficiently, and maneuver effortlessly in tight spaces.

PERFORMANCE

Rated Load Capacity	6,150-lb / 2,790-kg
Maximum Lift Height	19-ft / 5.79-m
Maximum Forward Reach	10-ft 1-in / 3.1-m
Load at Maximum Height	5,000-lb / 2,268-kg
Load at Maximum Reach	2,700-lb / 1,225-kg
Lift Speed (boom retracted)	Up 7.5 seconds / Down 6 seconds
Boom Speed	Extended 5 seconds / Retracted 5 seconds
Attachment Tilt	Forward 2.3 seconds / Backward 2.3 seconds
Top Travel Speed	22 mph / 35.4 km/h
Turning Radius Over Tires	142-in / 3.6-m
Operating Weight	13,600-lb / 6,170-kg

KEY FEATURES

- ✦ The JLG AG619 Telehandler delivers the muscle, reach, and versatility that the ag industry demands—without sacrificing maneuverability or efficiency—and is purpose-built for the grind, with rugged durability to keep you moving season after season.
- ✦ Bridging the gap between smaller loading equipment and larger loaders with up to a 22 mph travel speed and 19-ft lift height
- ✦ Capacity & Versatility; designed to handle loads up to 6,150-lb and capable of adapting to the most challenging terrain.
- ✦ 2-in receiver hitch for hauling and towing around the farm

STANDARD FEATURES:

CAB

- ✦ Enclosed Cab with Heat
- ✦ Single Joystick Proportional Controls with loader mode, integrated Fwd. & Rev. and gear selection
- ✦ Independent Engine and Vehicle Speed Controls
- ✦ Adjustable mechanical suspension seat with 3" Seat Belt
- ✦ Floor Mat
- ✦ Rear/ Roof Wiper
- ✦ Retractable Sunscreen
- ✦ Radio Ready Package
- ✦ Tilting Steering Column
- ✦ External Mirrors
- ✦ Load Stability Indicator (LSI)

DRIVELINE

- ✦ Deutz TCD 3.6 L04 - 100hp (74.4 KW) Engine
- ✦ Engine Heater
- ✦ 2-Speed Hydrostatic Transmission
- ✦ Reversing Fan
- ✦ Operator selectable 4-wheel circle, 4-wheel crab, 2-wheel front steering
- ✦ 405 70/20 14PR Bias Tires

HYDRAULICS

- ✦ Single Auxiliary Front Hydraulic Service
- ✦ Ride Control with Boom Float
- ✦ Lift and Telescopic Boom Soft Stop

STRUCTURES

- ✦ Coupler and Patented Boom Designed for Agriculture
- ✦ 2-in Receiver Hitch
- ✦ Boom Prop
- ✦ Fenders
- ✦ Slow-Moving Vehicle (SMV) Emblem
- ✦ Remote Grease in key areas

ELECTRICAL

- ✦ Battery Disconnect
- ✦ LED Work Lights
- ✦ Road Lights
- ✦ LED Motion / Amber Beacon (CS550)
- ✦ ClearSky Smart Fleet Hardware (CS550)
- ✦ Back Up Alarm

STANDARD SPECIFICATIONS

Engine

Make and Model	Deutz TCD 3.6
No. of Cylinders	4
Displacement	220 cu in / 3.6 L
Gross Power (Basic)	100 HP / 74.4 kW
Maximum Torque	302-lb-ft / 410 Nm
HP @ RPM	100 HP / 2,200 RPM
Fuel Tank Capacity	27.5 gal / 104 L

Hydraulic System-Implement

Capacity	34 gal / 130 L
Max. Auxiliary flow to Boom Head	24 gpm / 3,480 psi

Auxiliary hydraulics used for all attachments equipped with cylinders or other hydraulic components.

Transmission

Hydrostatic 2-Speed

Axles

Front	High bias limited slip differential on front axle.
Rear	Planetary on front and rear axles.

Tires

Standard	405/70 20 14PR Bias Tires
Optional	400/70 R20 Radial Tires

Brakes

Service Brakes	Inboard wet disc brake on front axle
Electric Parking Brakes	Wet disc spring-applied hydraulic release (SAHR)

ATTACHMENTS

Buckets

General Purpose Bucket	72-in, 1.3-cu yd / 1.8-m, 1.0-m³
General Purpose Bucket	82-in, 1.3-cu yd / 2.1-m, 1.0-m³
General Purpose Bucket	82-in, 2.0-cu yd / 2.1-m, 1.5-m³
High Volume Material Bucket	82-in, 2.6-cu yd / 2.1-m, 2.0-m³

Carriages

Standard Carriage	48-in / 1.2-m
Side-Tilt Carriage	48-in / 1.2-m

Forks

Pallet Forks	2-in x 4-in x 48-in / 51-mm x 102-mm x 1.2-m
	2.36-in x 5-in x 60-in / 60-mm x 127-mm x 1.5-m
	2.36-in x 5-in x 72-in / 60-mm x 127-mm x 1.8-m



Other

Bale Hugger
Bale Spears
Coupler Mounted Lifting Hook
Coupler Mounted Auger
Fork-Mounted Lifting Hook
Fork-Mounted Work Platform
Material Grapples
Universal Skid Steer Adapter

ACCESSORIES & OPTIONS

- ✦ Air Conditioning
- ✦ Cab Guard Package
- ✦ Multifunction Display with Reversing Camera & Electronic Load Charts
- ✦ Reverse Sensing System
- ✦ Single Rear Remote Hydraulics
- ✦ Dual Front Boom Remote Hydraulics
- ✦ Tool Box
- ✦ Rear Hitch Flat Mirror
- ✦ Rear Hitch Fish Eye Mirror
- ✦ 7 Way Round Trailer Connector
- ✦ Air Suspension Seat [optional heated]

DIMENSIONS & LOAD CHART

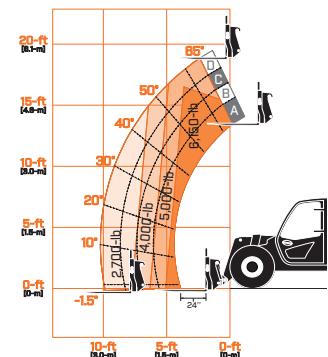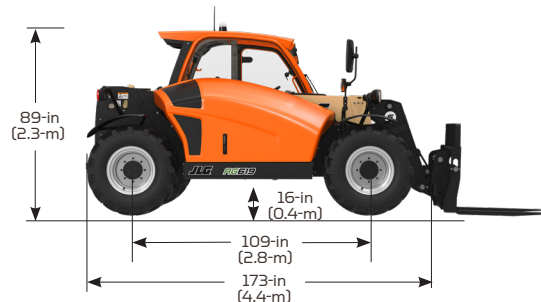

We provide coverage for one (1) full year on the entire machine, two (2) full years or 2,000 hours on the drivetrain and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification.



JLG Industries, Inc.
Toll-free US 833-JLG-FARM
JLGAgriculture.com
An Oshkosh Corporation Company