

D33 (PREVIOUS AUSA D151AHG)

ARTICULATED DUMPER



AUSA



STANDARD SPECIFICATIONS

General

Unloading System	Rotating
Load Capacity	3,307-lb / 1,500-kg
Chassis	Articulated
Water Bucket Capacity	18.36 cu-ft / 0.68 cu-yd
Level Bucket Capacity	22.14 cu-ft / 0.82 cu-yd
Heaped Bucket Capacity	31.86 cu-ft / 1.18 cu-yd
Weight (Empty)*	3,406-lb / 1,545-kg
Transmission	Hydrostatic

Engine

Brand	Kubota
Model	D1105-E4B
Power	20.7 hp / 15.4 kW
Operating Speed	2,400 rpm
Torque	70.3 N.m @ 1,600 rpm
No. of Cylinders	3
Emissions	Stage V - EPA Tier 4
Noise Level	TBD

Driving

Maximum Speed	9.9 mph / 16 km/h
Maximum Gradient	40%
External Turning Radius	10-ft 10-in / 3.30-m
Traction	4x4
Tires (Standard)	10.0/75-15.3-in

Hydraulic System

Main Pump	0.5 cu-in / 8 cc Gear Pump
Flow Rate	5.5 gal/min / 21 L/min
Working Pressure	2,610 psi / 180 bar

Tank Capacity

Fuel	9.9 gal / 37.5 L
Hydraulic System	6.5 gal / 24.5 L

Brakes

Service	Hydrostatic, Retention
Parking	Negative Brake and Electro-Hydraulic Release

*Certain options or country standard will increase weight.

**Electric version available, contact your representative for lead time information

PRELIM Spec Sheet for North America Market; Subject to Change.

Part No. 3140007 | R1025_01



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Company Business


D33 (PREVIOUS AUSA D151AHG)

ARTICULATED DUMPER

JLG
An Oshkosh Corporation Business

AUSA

DIMENSIONS

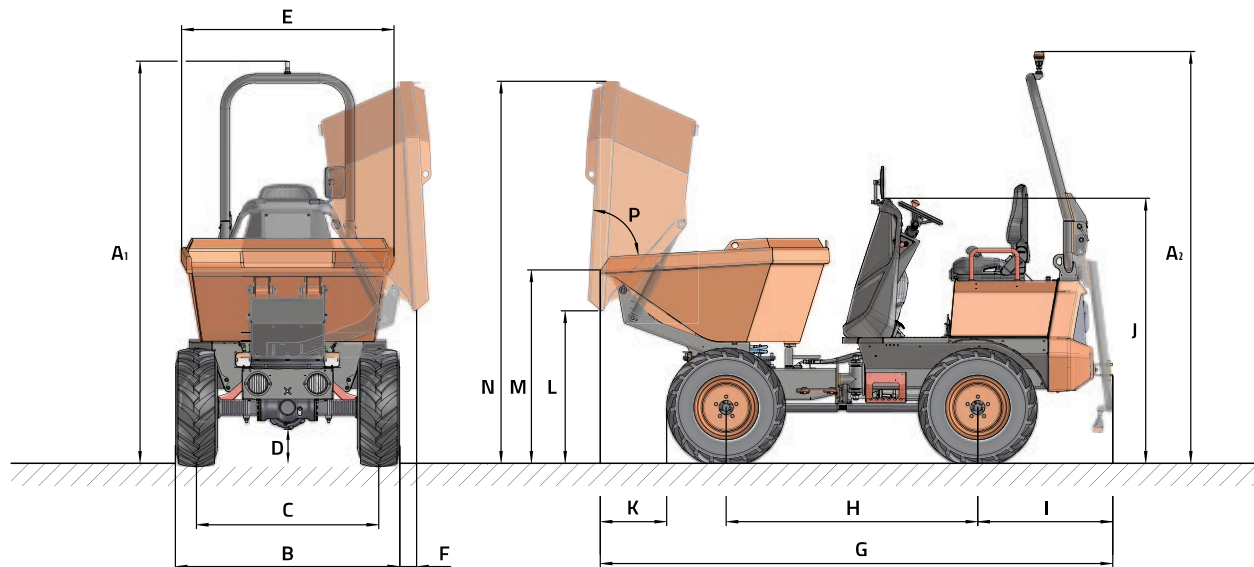

DIMENSIONS

A1. Overall Machine Height (Without Beacon)	8-ft 8.7-in / 2.66-m	H. Wheelbase	5-ft 3-in / 1.6-m
A2. Overall Machine Height (With Beacon)	8-ft 11.1-in / 2.72-m	I. Rear Overhang (ROPS Folded)	3-ft 0.8-in / 0.94-m
B. Overall Machine Width	4-ft 10.3-in / 1.48-m	J. Console Height (For Transport)	5-ft 9.3-in / 1.76-m
C. Rear Track Width	3-ft 11-in / 1.20-m	K. Front Overhang	1-ft 6.1-in / 0.46-m
D. Ground Clearance	8.7-in / 0.22-m	L. Bucket Discharge Height	3-ft 2.6-in / 0.98-m
E. Bucket Width	4-ft 7.1-in / 1.4-m	M. Bucket Loading Height	4-ft 1.6-in / 1.26-m
F. Side Overhang	4.9-in / 0.13-m	N. Bucket Height (Fully Tipped)	8-ft 3.2-in / 2.52-m
G. Overall Machine Length (Bucket Lowered)	11-ft 0.3-in / 3.36-m		

DIMENSIONS

P. Dump Angle	83 Degrees
----------------------	------------

*Certain options or country standard will increase weight.
Electric version available, contact your representative for lead time information
PRELIM Spec Sheet for North America Market; Subject to Change.

Part No. 3140007 | R1025_01

JLG

JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Company Business