

D66 (PREVIOUS AUSA D301AHG)

ARTICULATED DUMPER



AUSA



STANDARD SPECIFICATIONS

General

Unloading System	Rotating
Load Capacity	6,614-lb / 3,000-kg
Chassis	Articulated
Water Bucket Capacity	34.83 cu-ft / 1.29 cu-yd
Level Bucket Capacity	46.71 cu-ft / 1.73 cu-yd
Heaped Bucket Capacity	61.56 cu-ft / 2.28 cu-yd
Weight (Empty)*	5,071-lb / 2,300-kg
Transmission	Hydrostatic

Engine

Brand	Kubota
Model	V1505-E4B
Power	24.8 hp / 18.5 kW
Operating Speed	2,300 rpm
Torque	92.6 N.m @ 1,700 rpm
No. of Cylinders	4
Emissions	Tier 4
Injection	Mechanical Pump
Exhaust Aftertreatment	-
Noise Level	101 db(A)

Driving

Maximum Speed	11.2 mph / 18 km/h
Maximum Gradient	50%
External Turning Radius	13-ft / 3.96-m
Traction	4x4
Tires (Standard)	11.5 / 80-15.3-in

Hydraulic System

Hydraulic Circuit	0.73 cu-in / 12 cc Gear Pump
Flow Rate	6.6 gal/min / 25 L/min
Working Pressure	2,538 psi / 175 bar

Tank Capacity

Fuel	9.9 gal / 37.5 L
Hydraulic System	9.9 gal / 37.4 L

Brakes

Service	Sealed Hydraulic Drive
Parking	Sealed Negative Brake

*Certain options or country standard will increase weight.

PRELIM Spec Sheet for North America Market; Subject to Change.

Part No. 3140009 | R0826_02



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Company Business

D66 (PREVIOUS AUSA D301AHG)


ARTICULATED DUMPER



An Oshkosh Corporation Business

AUSA

DIMENSIONS

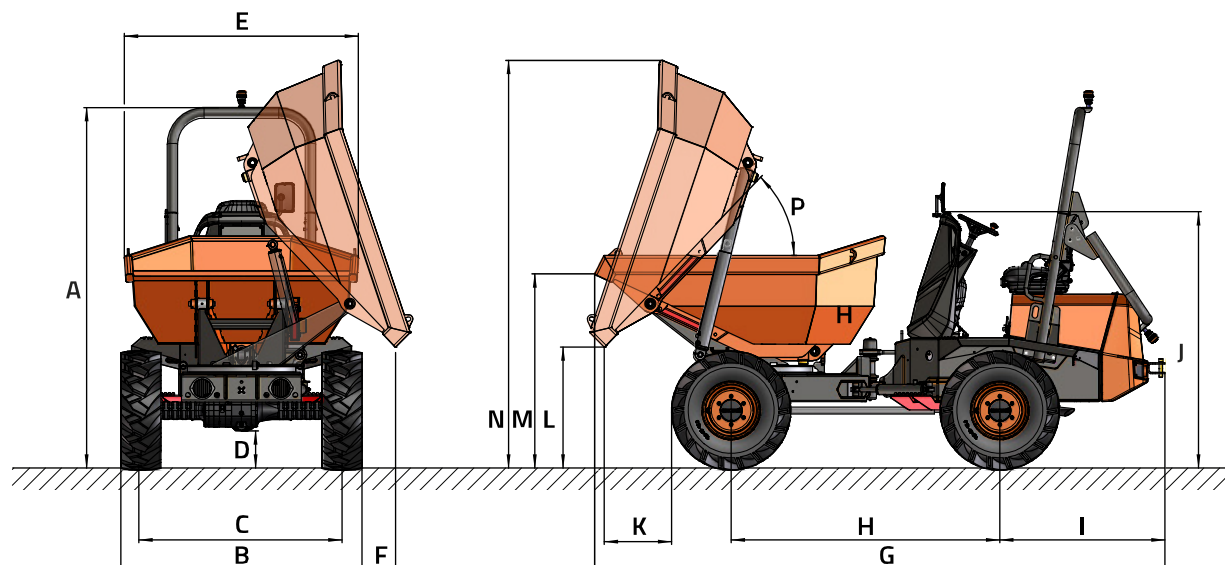

DIMENSIONS

A. Overall Machine Height (Without Beacon)	102.6-in / 2,605-mm	H. Wheelbase	76.8-in / 1,950-mm
B. Overall Machine Width	68.9-in / 1,750-mm	I. Rear Overhang (ROPS Folded)	47.2-in / 1,200-mm
C. Rear Track Width	57.5-in / 1,460-mm	J. Console Height (For Transport)	72.8-in / 1,850-mm
D. Ground Clearance	10.2-in / 260-mm	K. Front Overhang	19.3-in / 490-mm
E. Bucket Width	66.9-in / 1,700-mm	L. Bucket Discharge Height	34.1-in / 865-mm
F. Side Overhang	9.8-in / 250-mm	M. Bucket Loading Height	55.9-in / 1,420-mm
G. Overall Machine Length (Bucket Lowered)	163-in / 4,140-mm	N. Bucket Height (Fully Tipped)	116.1-in / 2,950-mm

DIMENSIONS

P. Dump Angle	46.5 Degrees
----------------------	--------------

