

D132 [PREVIOUS AUSA D601AHG]

ARTICULATED DUMPER

JLG
An Oshkosh Corporation Business

AUSA



STANDARD SPECIFICATIONS

General

Unloading System	Rotating
Load Capacity	13,228-lb / 6,000-kg
Chassis	Articulated
Water Bucket Capacity	58.86 cu-ft / 2.18 cu-yd
Level Bucket Capacity	86.67 cu-ft / 3.21 cu-yd
Heaped Bucket Capacity	111.24 cu-ft / 4.12 cu-yd
Weight (Empty)*	9,899-lb / 4,490-kg
Transmission	Hydrostatic

Engine

Brand	Deutz
Model	TD3.6 L4
Power	74.3 hp / 55.4 kW
Operating Speed	2,200 rpm
Torque	330 N.m @ 1,600 rpm
No. of Cylinders	4
Emissions	Tier 4F, Stage V
Injection	Common Rail
Exhaust Aftertreatment	DOC (Diesel Oxidation Catalyst)
Noise Level	101 dB(A)

Driving

Maximum Speed	15.5 mph / 25 km/h
Maximum Gradient	45%
External Turning Radius	19-ft 4-in / 5.90-m
Traction	4x4
Tires (Standard)	405 / 70-20-in
Turf Tires (Optional)	400 / 70-20-in
Flotation Pro Tires (Optional)	560 / 45-22.5-in

*Certain options or country standard will increase weight.
PRELIM Spec Sheet for North America Market; Subject to Change.
Part No. 3140013 | R0826_02

Hydraulic System

Hydraulic Circuit	1.52 cu-in / 25 cc Double Gear Pump
Flow Rate	13.2 gal/min / 50 L/min
Working Pressure	2,611 psi / 180 bar

Tank Capacity

Fuel	18.2 gal / 69 L
Hydraulic System	15.8 gal / 60 L

Brakes

Service	Sealed Brakes with Multiple Discs in Oil. Hydraulic Drive
Parking	Negative. Electro-Hydraulic Disengage

JLG

JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Company Business

D132 (PREVIOUS AUSA D601AHG)


ARTICULATED DUMPER



AUSA

An Oshkosh Corporation Business

DIMENSIONS

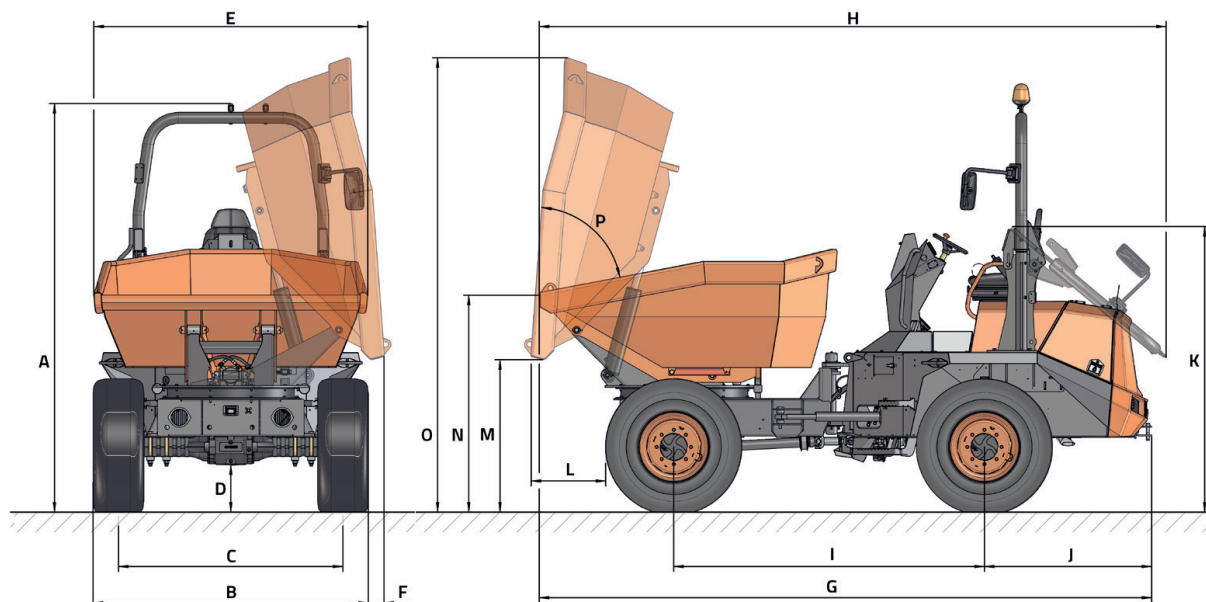

*General Image- Used for Reference Only

DIMENSIONS

A. Overall Machine Height (Without Beacon)	129.1-in / 3,280-mm	I. Wheelbase	98.0-in / 2,490-mm
B. Overall Machine Width	87.0-in / 2,210-mm	J. Rear Overhang (ROPS Folded)	52.8-in / 1,341-mm
C. Rear Track Width	70.9-in / 1,800-mm	K. Console Height (For Transport)	90.2-in / 2,291-mm
D. Ground Clearance	15.0-in / 380-mm	L. Front Overhang	22.8-in / 580-mm
E. Bucket Width	86.6-in / 2,200-mm	M. Bucket Discharge Height	48.0-in / 1,220-mm
F. Side Overhang	4.3-in / 110-mm	N. Bucket Loading Height	68.5-in / 1,740-mm
G. Overall Machine Length (Bucket Lowered)	193.3-in / 4,910-mm	O. Bucket Height (Fully Tipped)	143.3-in / 3,640-mm
H. Overall Machine Length (Transport)	198.0-in / 5,030-mm		

DIMENSIONS

P. Dump Angle	75 Degrees
----------------------	------------

