

DR132 (PREVIOUS AUSA DR601AHG)

ARTICULATED DUMPER

JLG
An Oshkosh Corporation Business

AUSA



STANDARD SPECIFICATIONS

General

Unloading System	Rotating
Load Capacity	13,228-lb / 6,000-kg
Chassis	Articulated
Water Bucket Capacity	58.86 cu-ft / 2.18 cu-yd
Level Bucket Capacity	86.67 cu-ft / 3.21 cu-yd
Heaped Bucket Capacity	111.51 cu-ft / 4.13 cu-yd
Weight (Empty)*	10,648-lb / 4,830-kg
Transmission	Hydrostatic

Engine

Brand	Deutz
Model	TD3.6 L4
Power	74.3 hp / 55.4 kW
Operating Speed	2,200 rpm
Torque	330 N.m @ 1,600 rpm
No. of Cylinders	4
Emissions	Tier 4
Injection	Common Rail
Exhaust Aftertreatment	DOC (Diesel Oxidation Catalyst)
Noise Level	101 dB(A)

Driving

Maximum Speed (Facing Counterweight)	15.5 mph / 25 km/h
Maximum Speed (Facing Bucket)	9.3 mph / 14 km/h
Maximum Gradient	45%
External Turning Radius	19-ft 4-in / 5.90-m
Traction	4x4
Tires (Standard)	405 / 70-20-in
Turf Tires (Optional)	400 / 70-20-in
Floation Pro Tires (Optional)	560 / 45-22.5-in

*Certain options or country standard will increase weight.

PRELIM Spec Sheet for North America Market; Subject to Change.
Part No. 3140014 | R1025_01

Hydraulic System

Hydraulic Circuit	Double Gear Pump
Flow Rate	13.2 gal/min / 50 L/min
Working Pressure	2,611 psi / 180 bar

Tank Capacity

Fuel	18.2 gal / 69 L
Hydraulic System	15.9 gal / 60 L

Brakes

Service	Sealed Brakes, Hydraulic Drive
Parking	Negative

JLG

JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Company Business


DR132 (PREVIOUS AUSA DR601AHG)

ARTICULATED DUMPER



AUSA

DIMENSIONS

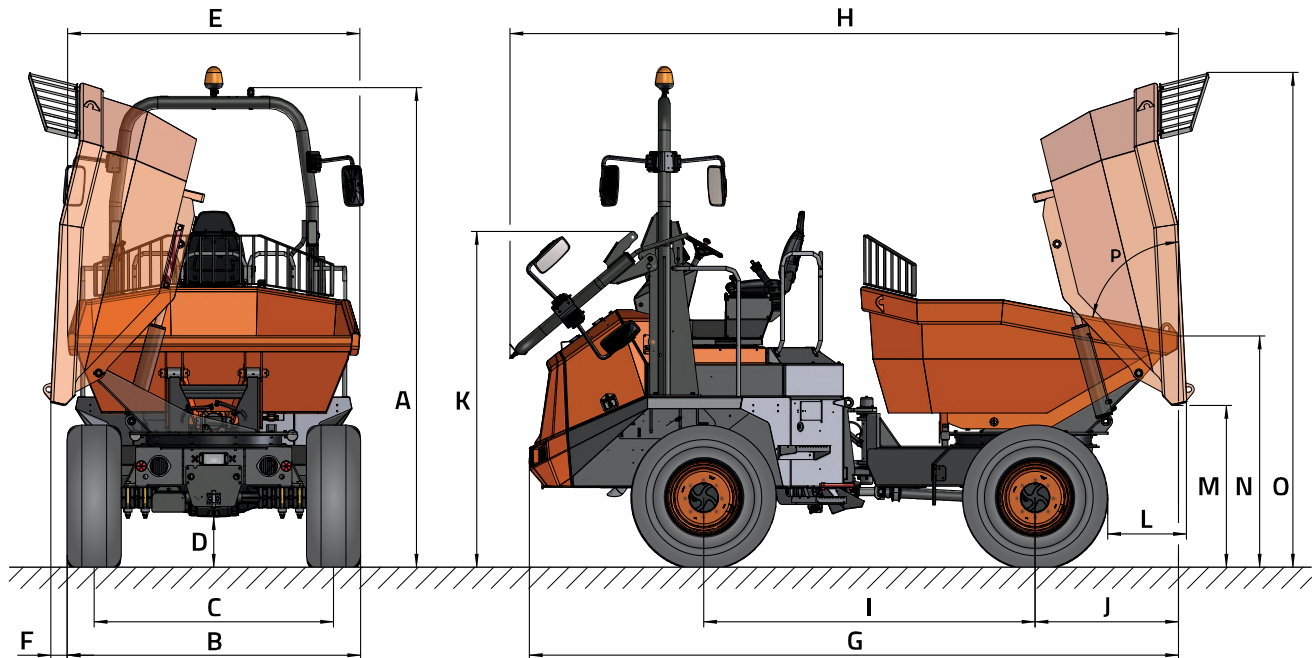

DIMENSIONS

A. Overall Machine Height (Without Beacon)	11-ft 10.1-in / 3.61-m	I. Wheelbase	8-ft 2-in / 2.49-m
B. Overall Machine Width	7-ft 3-in / 2.21-m	J. Rear Overhang (ROPS Folded)	3-ft 6.5-in / 1.08-m
C. Rear Track Width	5-ft 10.9-in / 1.8-m	K. Console Height (For Transport)	8-ft 3.6-in / 2.53-m
D. Ground Clearance	1-ft 3-in / 0.38-m	L. Front Overhang	1-ft 10.8-in / 0.58-m
E. Bucket Width	7-ft 2.6-in / 2.2-m	M. Bucket Discharge Height	4-ft / 1.22-m
F. Side Overhang	4.3-in / 0.11-m	N. Bucket Loading Height	5-ft 8.5-in / 1.74-m
G. Overall Machine Length (Bucket Lowered)	16-ft 1.3-in / 4.91-m	O. Bucket Height (Fully Tipped)	12-ft 2.5-in / 3.72-m
H. Overall Machine Length (Transport)	16-ft 6-in / 5.03-m		

DIMENSIONS

P. Dump Angle	75 Degrees
----------------------	------------

