
BOLT-ON EXTERNAL FALL ARREST SYSTEM
ACCESSORIES

Work Outside the Platform at Height

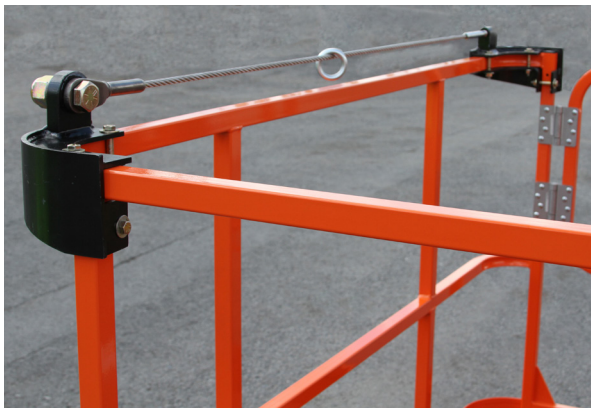


When your work requires you to exit the platform above elevation, JLG helps keep you safe and mobile with our Bolt-On External Fall Arrest System. This system uses a cable that allows the operator to leave the platform and move freely without detaching the safety harness. This helps keep the operator tethered to the platform at all times.

Features and Benefits:


- Available for a variety of boom lift applications, including aviation and steel erection
- Allows workers to walk a maximum of 6 ft beyond the platform
- Enhances worker protection
- Easily interchangeable between JLG machines
- Designed for 36” x 72” and 36” x 96” wide platforms with the swing gate option

How To Choose Your Bolt-On External Fall Arrest System:

- Refer to **STEP 1** and Follow the Instructions Outlined in **RED**

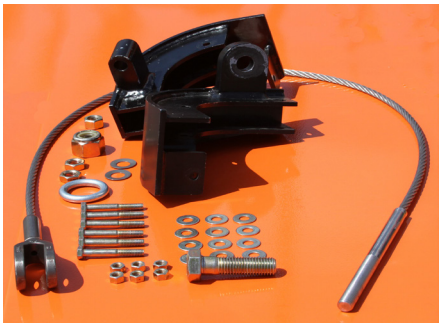



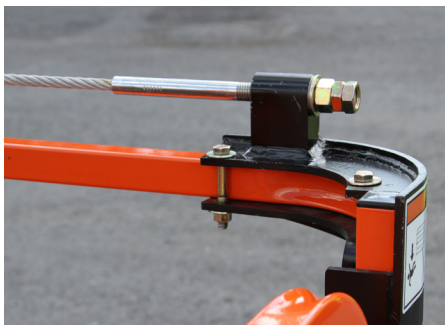

Order Today

Online: onlineexpress2.jlg.com
Call: 1-877-554-5438 | **Fax:** 1-800-733-8939

JLG GENUINE

JLG Industries, Inc
1 JLG Drive | McConnellsburg, PA 17233-9533 | Toll-Free in US 877-JLG-LIFT
www.jlg.com

An Oshkosh Corporation Company

STEP 1: BOLT-ON FALL ARREST AND MACHINE CAPABILITY IDENTIFICATION CHART

Refer to the chart below to determine if machine is capable of being fitted with a Bolt-On External Fall Arrest System.

If machine does not fall within the below serial number ranges, **STOP**, it **cannot** be optioned with a Bolt-On External Fall Arrest System

JLG Model	Serial Breaks	
	36 in x 72 in (91 cm x 183 cm)	36 in x 96 in (91 cm x 244 cm)
400S, 460SJ	0300146621 TO PRESENT	0300272174 TO PRESENT
400S HC3, 460SJ HC3	0300271832 TO PRESENT	0300271832 TO PRESENT
E600, M600	0300188650 TO PRESENT	NOT AVAILABLE
E600J, M600J	0300097060 TO PRESENT	0300251813 TO PRESENT
600A, 600AJ (8ft chassis only)	0300128330 TO PRESENT	0300080181 TO PRESENT
600S, 600SJ, 660SJ	0300125318 TO PRESENT	0300080179 TO PRESENT
600S HC3, 660SJ HC3	0300273416 TO PRESENT	0300273416 TO PRESENT
800A, 800AJ	0300128364 TO PRESENT	0300080176 TO PRESENT
800S, 860SJ	0300128362 TO 0300162810	0300080174 TO 0300162810
	0300162810 TO 0300182743 (Contact JLG Parts)	
	0300182743 TO PRESENT	0300182743 TO PRESENT
810SJ	ALL	
1200SJP, 1350SJP	0300080177 tO PRESENT*	0300080177 TO PRESENT*
	0300147130 TO PRESENT**	0300147130 TO PRESENT**
1250AJP	0300138710 TO PRESENT	0300138710 TO PRESENT
1500AJP	ALL	
1500SJ	ALL	
1850SJ	ALL	

Note:
* ANSI
**ANSI Export Spec, CSA, Japan and China specifications

Prohibited Options/Items:

- Four Corner Platform Lights
- Pipe Racks
- Platform Mesh to Mid Rail
- Platform Mesh to Top Rail
- Soft Touch
- Platform Top Rail Extension
- SkyGlazier
- SkySense



Proceed to STEP 2.


If machine does not fall within the serial number ranges listed in STEP 1: BOLT-ON EXTERNAL FALL ARREST AND MACHINE CAPABILITY IDENTIFICATION CHART, it cannot be optioned with a Bolt-On External Fall Arrest System.


STEP 2: IDENTIFY PLATFORM

Refer to below pictures to determine platform handrail style that machine is equipped with.

Platform must have Hand Rail design (B); shown below. Bolt-On External Fall Arrest System **WILL NOT** mount on platforms with Hand Rail design (A): shown below. If you have design (A), you must purchase the most current 36 in (91 cm) wide side entry platform available for your machine.

Platform must be equipped with Left Side Swing Gate option. Not compatible with platforms having Left Side Drop Bar entry gate. Machines with a Left Side Drop Bar entry gate require the purchase of the Swing Gate Conversion Kit.

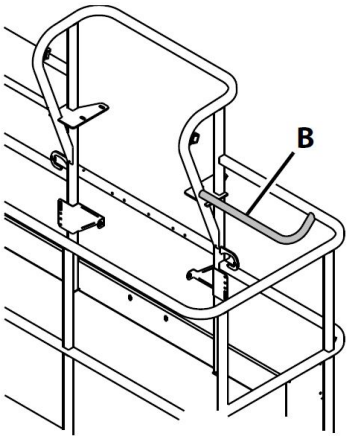

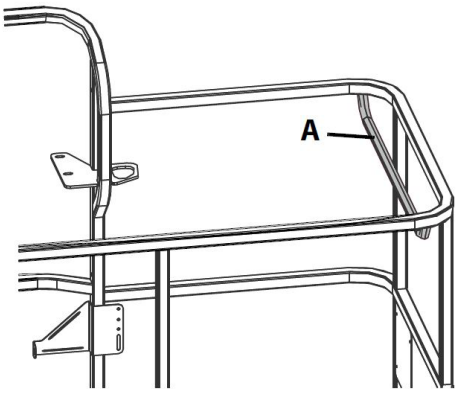

		Swing Gate Platform P/N to replace Platform A	
Platform Handrail Style A	Requires purchase of new platform	6 ft (72 in) (183 cm)	8 ft (96 in) (244 cm)
		1001186384S	1001186383S

		Drop Bar	Swing Gate
Platform Handrail Style B	Determine Entry Gate Style	Requires purchase of Swing Gate Conversion Kit: P/N 1001142505	No additional purchase required

Refer to **STEP 3** for correct kit part number





If machine does not fall within the serial number ranges listed in STEP 1: BOLT-ON EXTERNAL FALL ARREST AND MACHINE CAPABILITY IDENTIFICATION CHART, it cannot be optioned with a Bolt-On External Fall Arrest System.

STEP 3: CHOOSE YOUR FALL ARREST PLATFORM

Choose your Bolt-On External Fall Arrest Kit according to the chart below.

Platform Size	Fall Arrest Kit P/N
36 in x 72 in (91 cm x 183 cm)	1001237883
36 in x 96 in (91 cm x 244 cm)	1001237882



If machine does not fall within the serial number ranges listed in STEP 1: BOLT-ON EXTERNAL FALL ARREST AND MACHINE CAPABILITY IDENTIFICATION CHART, it cannot be optioned with a Bolt-On External Fall Arrest System.